
13443 98-07 TOYOTA LANDCRUISER & 98-07 LEXUS LX470

11/02/2020

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 5000 LBS. TRAILER WEIGHT & 500 LBS. TONGUE WEIGHT. GROSS LOAD CAPACITY WHEN USED AS A WEIGHT DISTRIBUTION HITCH: 6000 LBS. TRAILER WEIGHT & 600 LBS. TONGUE WEIGHT

DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.

HAVING INSTALLATION QUESTIONS? CALL TECHNICAL SUPPORT AT 877-287-8634

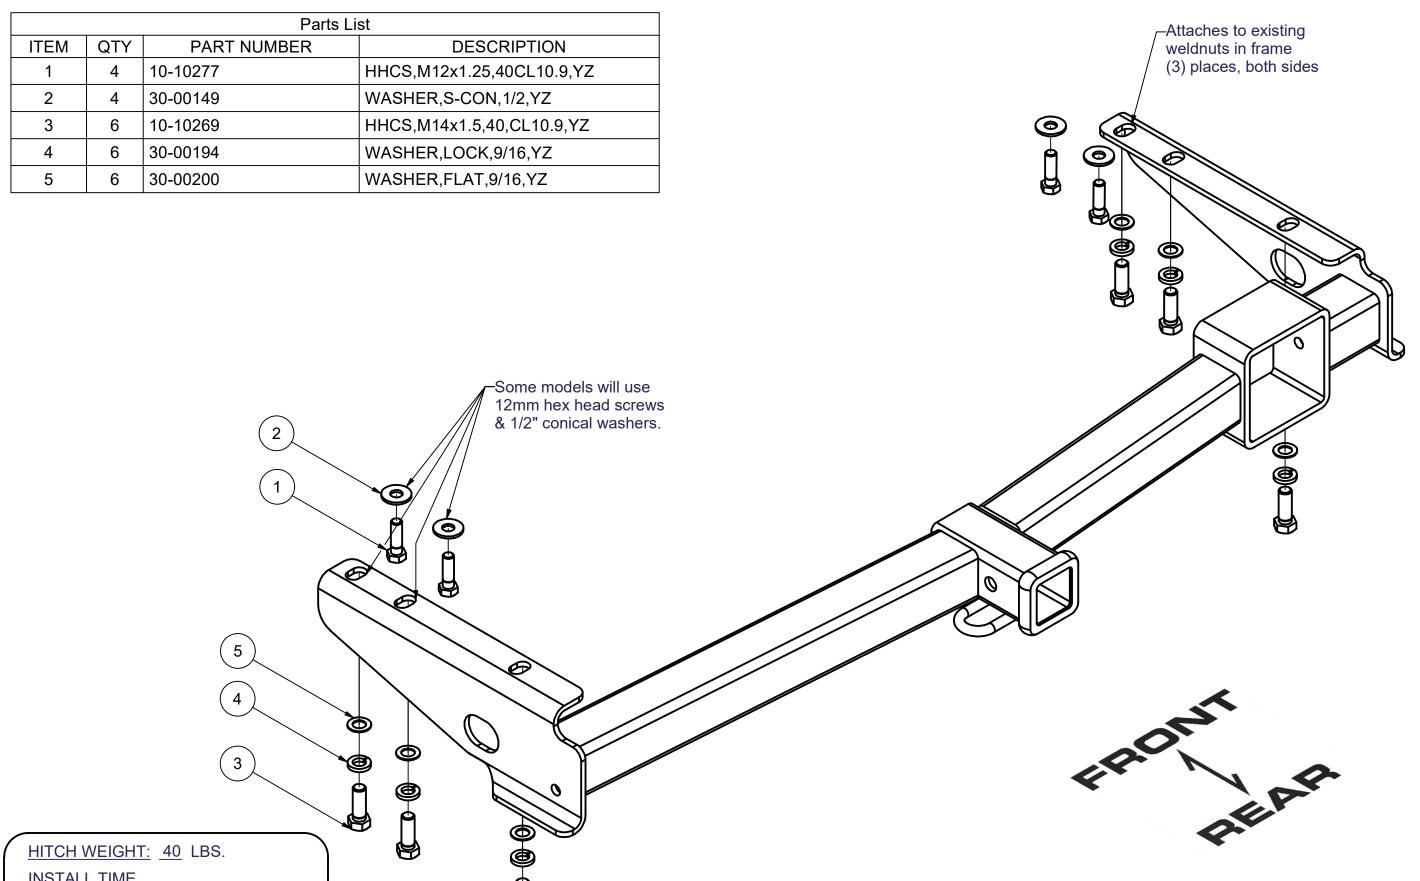

INSTALLATION STE	PS		
NO DRILLING REQUIRED			
INSTALL NOTES:			
NOVICE (DIY): <u>60</u> MINUTES	l B		
PROFESSIONAL: 30 MINUTES			
INSTALL TIME			

- Remove the tow hook and (2) tiedowns from rear of vehicle frame, return them along with two (2) fasteners to the vehicle owner. The remaining (2) fasteners will be used in the hitch installation.
- 2) Raise hitch into position while inserting exhaust pipe through large opening in hitch crossmember (postition hitch as shown making sure the rearmost hole in frame is not used).
- 3) Secure hitch by installing fasteners as shown.
- 4) Torque all 12mm hardware to 86 ft-lbs. Torque all 14mm hardware to 136 ft-lbs.

PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.

Curt Manufacturing Inc., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.