

2072100

Parts List

2	Winch adapter plate	
4	Hex head bolt, M10 - 1.50 x 120mm	
8	Flat washer, M10	
4	Lock washer, M10	
4	Hex nut, M10	

This hardware is for a standard winch installation. Due to manufacturer deviation additional hardware may be required.

Socket, 16mm

Tools Required

Torque wrench

Torque Specifications			
MEIRIC	M6 bolt	3 ftlbs.	
	M8 bolt	7 ftIbs.	
	M10 bolt	16 ftlbs.	
	M12 bolt	28 ftIbs.	
SAE	1/4" bolt	3 ftlbs.	
	5/16" bolt	7 ftIbs.	
	3/8" bolt	16 ftIbs.	
	7/16" bolt	20 ftlbs.	
	1/2" bolt	28 ftlbs.	

Level of Difficulty

Easy



Product Image



Notes and Maintenance

Before you begin installation, read all instructions thoroughly.

Proper tools will improve the quality of installation and reduce the time required.

For black finishes, mild soap may be used to clean the product.


Refer to the table to the left when securing hardware during the installation process to help prevent damage to the product or vehicle.

Step 1

Place the winch adapter plate onto the slot in the bumper. Place the winch on the adapter.

Note: If using the roller fairlead, this needs to be attached prior to the placement of the winch.






Step 2

Attach the winch and adapter plate to the bumper using four M10 hex bolts, lock washers and flat washers. Run the bolts up into the winch from the inside of the bumper.

Note: Some winches may require additional mounting hardware.

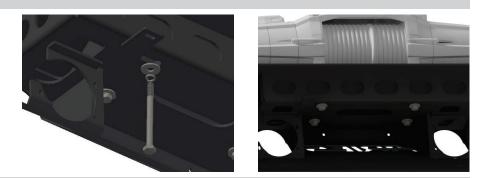

Step 3

Torque hardware to the winch manufacturer's recommendations.

Congratulations on the installation of your new ARIES winch adapter plate.

