## INSTALLATION INSTRUCTIONS AND PARTS LIST

## VEHICLE APPLICATION: MODEL 250935 (12" X 20") REAR MUDGUARDS MODEL 250937 (12" X 23") REAR MUDGUARDS 2019 RAM 1500 SERIES TRUCKS

- 1. READ INSTRUCTIONS COMPLETELY AND CHECK TO MAKE SURE THAT ALL REQUIRED PARTS (LISTED ON SERVICE PARTS LIST) ARE ON HAND BEFORE STARTING THE INSTALLATION.
- 2. INSTALL THE MUDGUARDS AS FOLLOWS:
  - 2.1. REMOVE THE HEX HEAD FACTORY FENDER BOLT FROM THE OUT SIDE OF THE FENDER AS SHOWN IN FIG 1.
  - 2.2. POSITION THE MUDGUARD AGAINST THE WHEEL WELL FLANGE AND INSTALL (4) SCREWS (ITEM #6) IN TO THE FACTORY HOLES.
  - 2.3. WITH THE MUD GUARD IN PLACE DRILL ¼ HOLE ON THE INSIDE OF THE WHEEL LINER AS SHOWN IN FIG 1.
  - 2.4. INSTALL THE BOLT (ITEM #3) WITH A WASHER (ITEM #5) ON EACH SIDE OF THE MUD GUARD AND WHEEL LINER SECURE WITH THE NUT (ITEM#4).
  - 2.5. REPEAT FOR THE OPPOSITE SIDE.



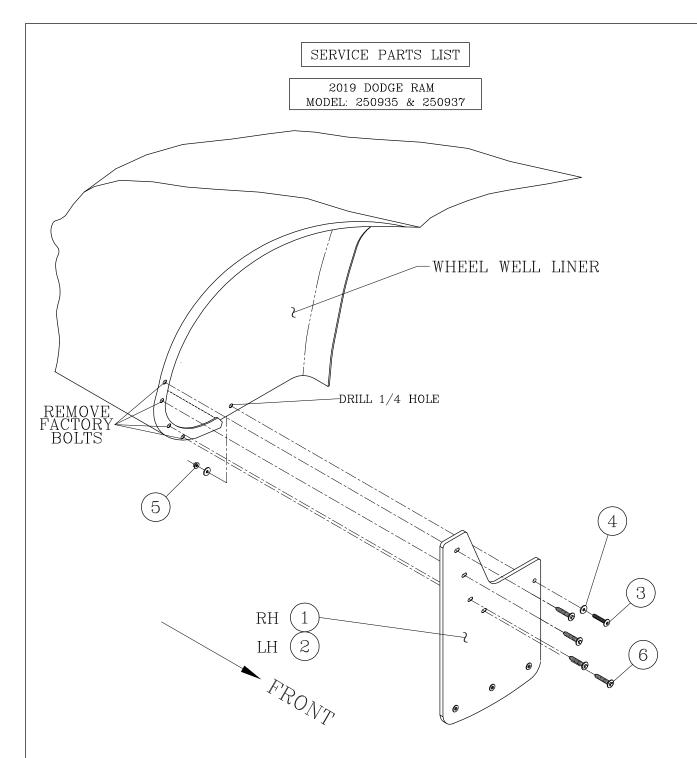


fig.1

REAR INSTALLATION
RIGHT (PASSENGER) SIDE SHOWN

ITEM	QTY	DESCRIPTION
1 2 1 2 3 4 5 6	1 1 1 1 2 2 4 8	MUDGUARD-RUBBER, 20" RAM,RH MUDGUARD-RUBBER, 20" RAM,LH MUDGUARD-RUBBER, 23" RAM,RH MUDGUARD-RUBBER, 23" RAM,LH SCREW- BTN HD SOC, SST, 1/4-20 X 1.0" NUT-HEX,NYL, 1/4-20,SST WSHR-FNDR, 1/4 X1, SST,18-8,BZP SCR-SEMS,7MMHH,M4.2-1.41X30MM

