

# EGR INSTALLATION INSTRUCTIONS

## Tools Required



Clean Dry Cloth



Soap & Water



Non-Permanent Marker



#2 Phillips Head Screwdriver



NO POWER TOOLS

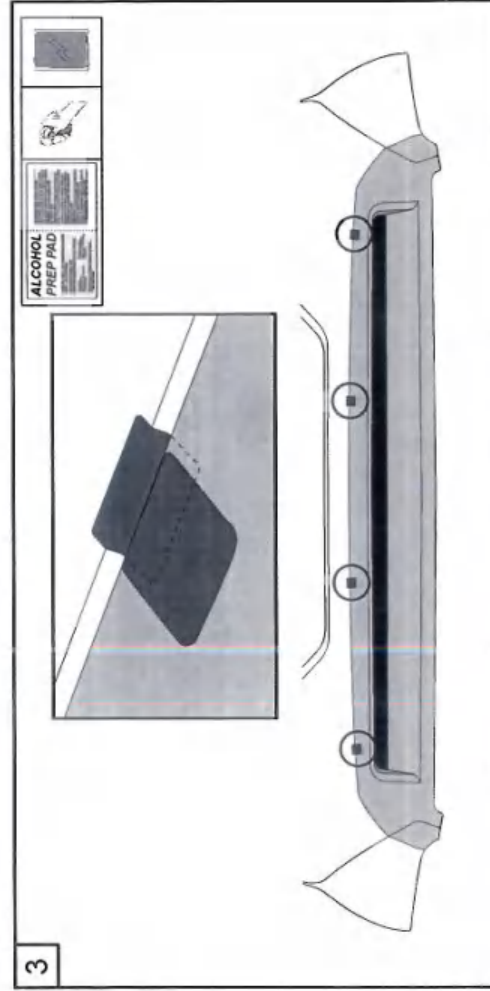
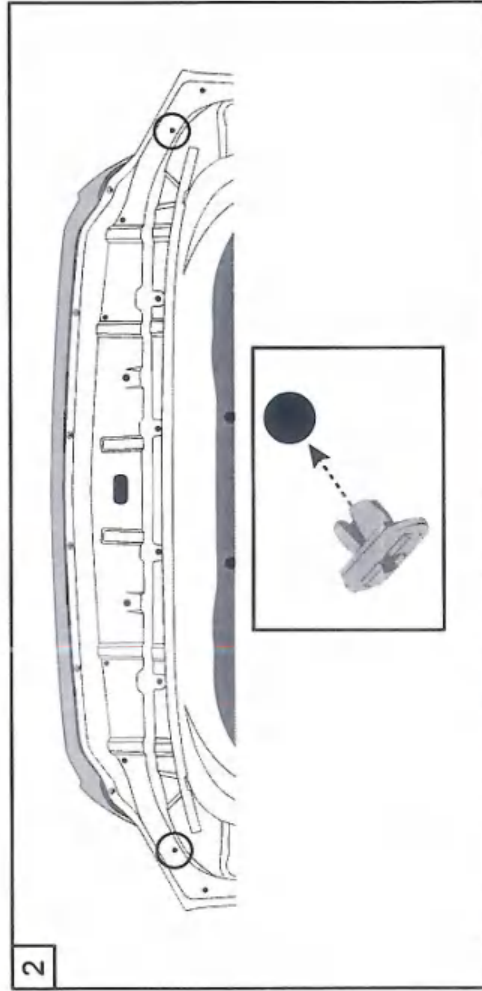
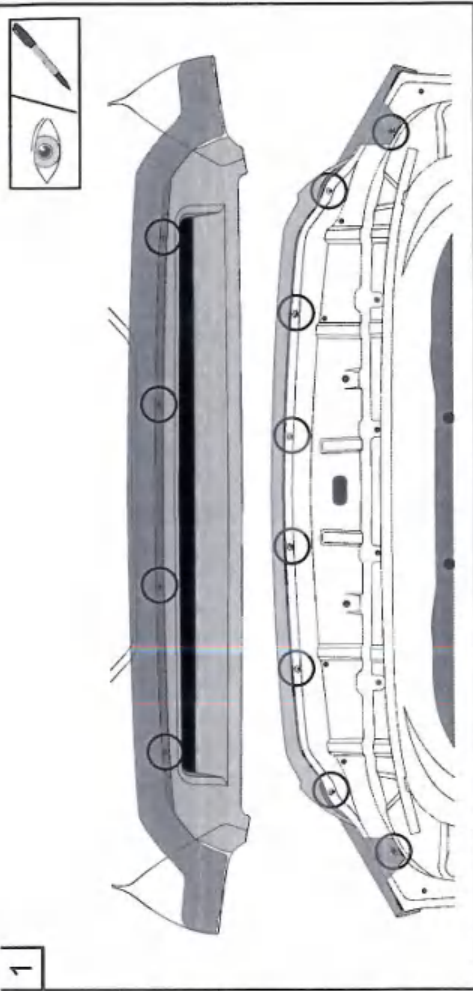
## Cleaning Notes

- Spray with a firm water spray to remove any loose dirt.
- Wash with water, detergent and a soft cloth or sponge.
- Do not use petroleum based solvents or abrasives.

**1•** Wash the hood with a mild soap and water solution, then dry thoroughly. Open the hood. Trial fit the Hood Protector centrally onto the hood. With a non-permanent marker, note and mark the positions of the four center acrylic tag slots in the Hood Protector onto the grille. Note and mark the positions of the two outer acrylic tag slots in the Hood Protector and where they correspond with the two holes on the underside of the hood. Note the six grille retaining nuts on the underside of the hood. Remove the Hood Protector.



**2•** Insert screw plugs provided into the two vacant holes in the hood.

**3•** Clean the four noted areas with the alcohol wipe provided. Wipe off any residue with a dry clean cloth. Adhere four abrasive resistant tape strips to the top surface of the grille, and four abrasive resistant tapes to the hood with approximately one third of the abrasive tape on the top surface of the hood and two thirds under the grille.



# EGR INSTALLATION INSTRUCTIONS

**Tools Required**

	Clean Dry Cloth		Non-Permanent Marker
	Soap & Water		#2 Phillips Head Screwdriver



**NO POWER TOOLS**

**Cleaning Notes**

- Spray with a firm water spray to remove any loose dirt.
- Wash with water, detergent and a soft cloth or sponge.
- Do not use petroleum based solvents or abrasives.

**4•** Using a 10mm socket loosen the 6 retaining nuts that hold the grille to the hood, for installing the clips between hood and grille. Do not fully remove retaining nuts. Install the four metal onto the top back edge of the grille. Once positioned correctly tighten the six retaining nuts using a 10mm socket.

**IMPORTANT:** Ensure the clips rest over the abrasive resistant tape and do not come in contact with hood paint work. Failure to do this may result in permanent paint damage.

**5•** Align the Hood Protector centrally with the hood. Push the center tag into the four previously installed metal clips, securing the Hood Protector to the hood.

**6•** While maintaining thumb pressure against the underside of the Hood Protector, insert the two screws through the two washer into the screw plugs and tighten screws.

**Important:** Thumb pressure must be maintained on the Hood Protector to prevent the screw plug from rotating. **DO NOT OVER-TIGHTEN SCREWS.**

**TO REMOVE:** Reverse the above procedure.

