

56084

NISSAN CUBE

WIRING LOCATION GUIDE GUÍA DE UBICACIÓN DEL CABLEADO IDE D'EMPLACEMENT DES FILS



MUST READ FIRST!

All steps must be followed to ensure correct function of the T-Connector. To verify proper installation once installed, test by connecting a test light or properly wired trailer.




¡DEBE LEERSE PRIMERO!

Debe seguirse todos los pasos para asegurar el correcto funcionamiento del Conector-T. Para verificar la correcta instalación, pruebe conectando una luz de prueba o un remolque debidamente cableado.

À LIRE D'ABORD!

Pour assurer le bon fonctionnement du T-Connector, il faut suivre toutes les étapes. Pour vérifier que l'installation a été bien effectuée, branchez un feu de test ou une remorque correctement filéée.

11/5/09

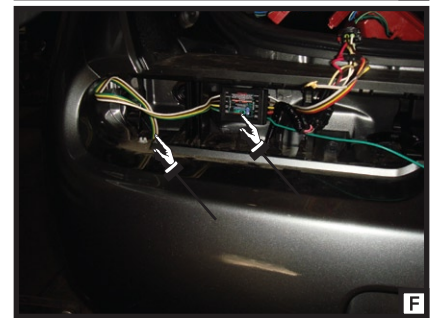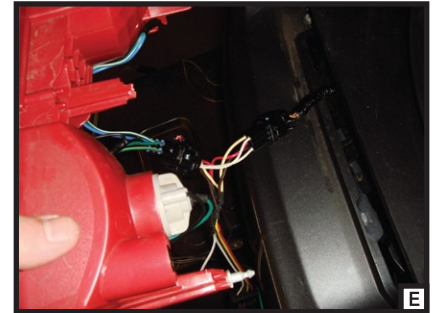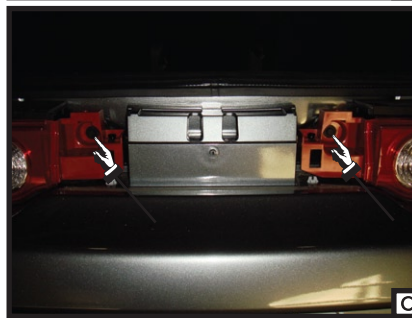


English

1. Open the rear hatch. Remove two plastic fasteners holding black plastic cover in place. **[A]** Remove plastic cover being sure not to damage alignment tabs. Under plastic cover locate two square tabs and using a flat head screwdriver align tabs with the hole to remove Cube reflector. **[B]** On each side of the vehicle remove a 10 mm bolt holding the taillights in place. **[C]** Remove the taillights to locate the vehicles taillight wiring harness. **[D]** The harness will have connectors similar to those on the T-connector harness.
2. On the drivers side separate the connectors being sure not to damage the locking tabs. Insert the T-connector end with the yellow wire in-between the separated connectors. Make sure the connectors are fully inserted with locking tabs in place. **[E]**
3. Route the T-connector end with the green wire across to the passenger side on the top side of the bumper and behind the center bracket. Repeat step 2 on the passenger side using the green wire.
4. Locate a suitable grounding point near the connector such as an existing screw with nut in the vehicle's frame or drill a 3/32" hole and secure white wire using eyelet and screw provided.
5. Adhere the black converter box to the frame of the car using the double-sided tape provided. **[F]** Secure any loose parts of the T-connector with the cable ties provided.
6. Route the 4-flat wire down thru the opening under the taillight assembly. **[F]** Under the vehicle route the 4-flat wire to the center of the vehicle and secure using cable ties provided. Re-install any parts removed during installation.

Warning!

Verify that miscellaneous items that may be hidden behind or under any surface before drilling to avoid damage and/ or personal injury.

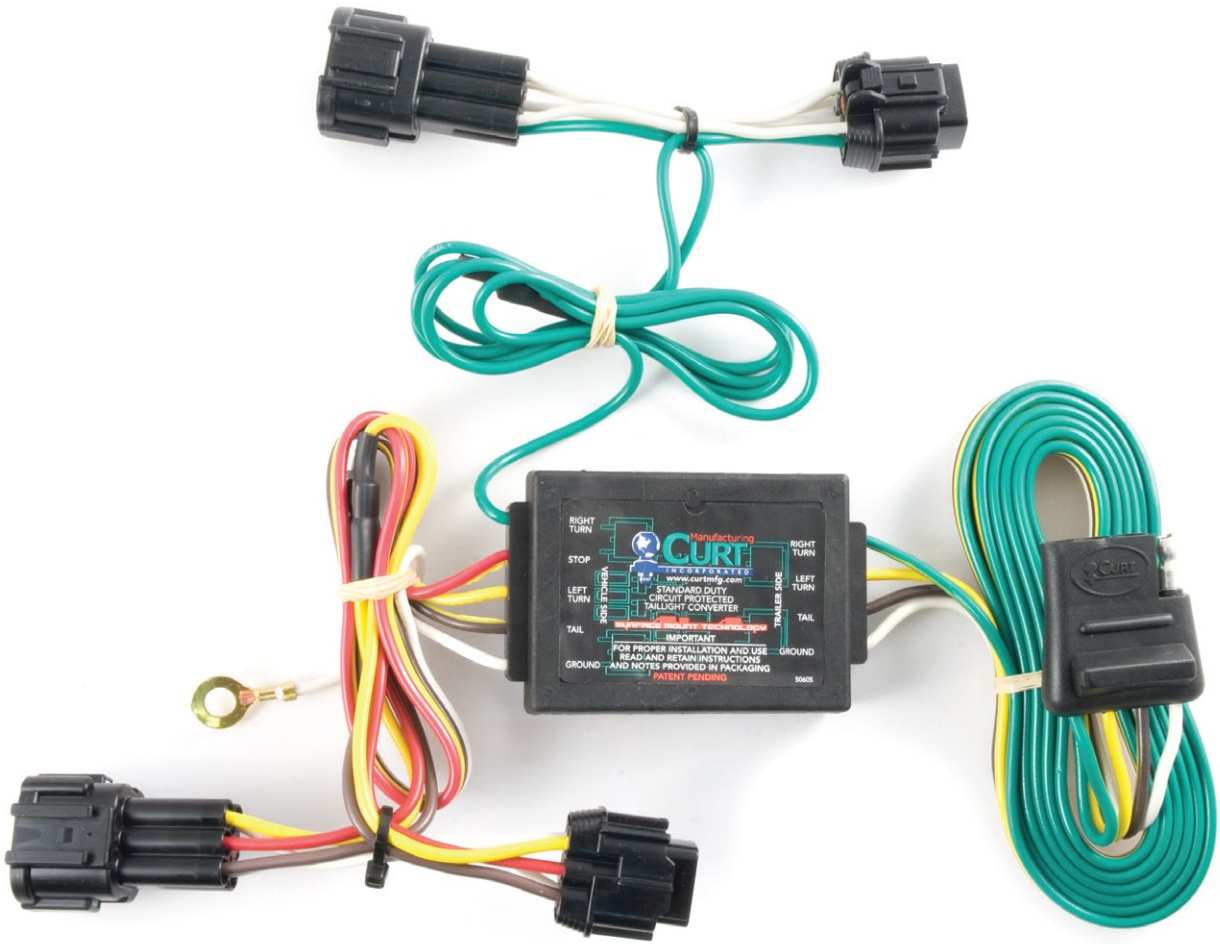

56084