

## INSTALLATION INSTRUCTIONS

APPLICATION: MOUNT KIT #27-2205 / CHEVY COLORADO & GMC CANYON CREW CAB APP PART # 27-6630, 27-6130, 27-6135, 27-0010, 27-0015


ITEM	QUANTITY	DESCRIPTION	TOOLS NEEDED
1	1	SURE GRIP RUNNING BOARD	RATCHET
2	3	MOUNTING BRACKET A	TORQUE WRENCH
3	3	MOUNTING BRACKET B	SOCKET EXT.
4	12	M8 HEX HEAD CAP SCREW (YELLOW ZINC)	13MM SOCKET
5	12	M8 FLAT WASHER 20MM (YELLOW ZINC)	13MM WRENCH
6	12	M8 SPLIT LOCK WASHER (YELLOW ZINC)	1/2" SOCKET
7	12	M8 U-NUT (YELLOW ZINC)	1/2" WRENCH
8	12	5/16" SPLIT LOCK WASHER (YELLOW ZINC)	
9	12	5/16" FLAT WASHER (YELLOW ZINC)	
10	12	5/16" SQUARE HEAD BOLT (YELLOW ZINC)	
11	12	5/16" HEX NUT (YELLOW ZINC)	


## ANTI-SEIZE LUBRICANT MUST BE USED ON ALL STAINLESS STEEL FASTENERS TO PREVENT THREAD DAMAGE AND GALLING .


- 1. Remove contents from box, verify if all parts listed are present and undamaged. Carefully read and understand all instructions before attempting installation.
- 2. If vehicle has plastic covers, remove the designated covers from the rocker panel where mounts will be placed, see Figure 1.
- 3. Install M8 u-clip nuts in the holes where the plastic covers were removed, See Figure 2.
- 4. Loosely install mounting brackets to the previously install M8 u-clips with supplied M8 hardware, see Figure 3. (Note: The middle bracket will be closer to the front bracket then in comparison to the rear bracket, see Figure 6 for orientation and direction of brackets.)
- 5. Loosely install the running board to the previously installed mounting brackets with supplied 5/16" hardware, see Figure 5. (Note: Slide square head bolts through t-slots underneath running board, see Figure 4.)
- 6. Align and adjust as necessary then torque: M8 and 5/16" hardware to 15-18 ft-lbs.





1

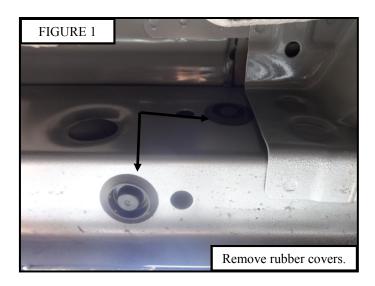

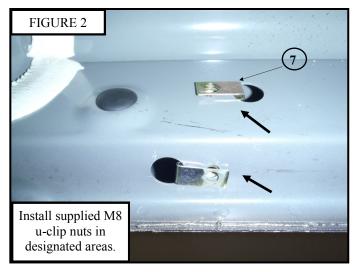




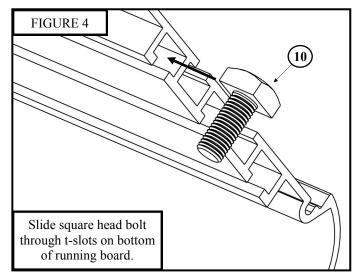

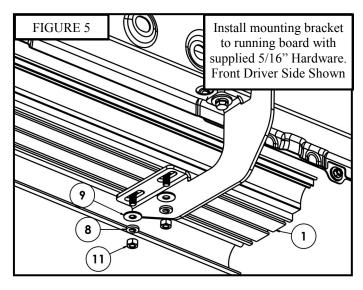



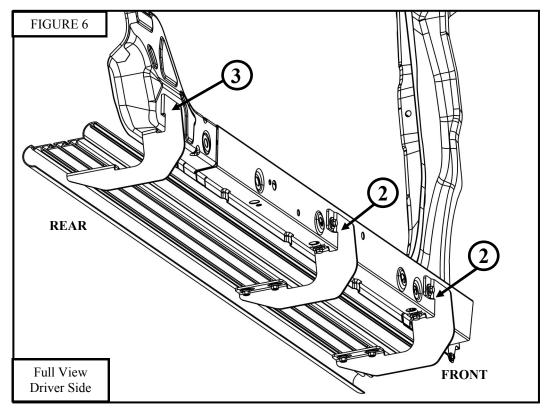



## **CARE INSTRUCTIONS**

- REGULAR WAXING IS RECOMMENDED. DO NOT USE ANY TYPE OF POLISH OR WAX THAT MAY CONTAIN ABRASIVES.
- STAINLESS STEEL PRODUCTS CAN BE CLEANED WITH MILD SOAP AND WATER. STAINLESS STEEL POLISH SHOULD BE USED TO POLISH SMALL SCRATCHES.
- GLOSS BLACK FINISHES SHOULD BE CLEANED WITH MILD SOAP AND WATER.



Westin Automotive Products, Inc. 320 Covina Blvd San Dimas, Ca. 91773