



Drop Hitch User Guide

THE BOSS
TORSION  FLEX





Torsion Hitch Users Guide

This product is protected by Patent # US9505281B1, USD773345S1, USD9868327B1


Recommendation: Grease with marine grade grease every 3,000 miles.



SCAN ME!

Pintle lock: used to secure lunette pintle ring to hitch

$2\frac{5}{16}$ " Ball

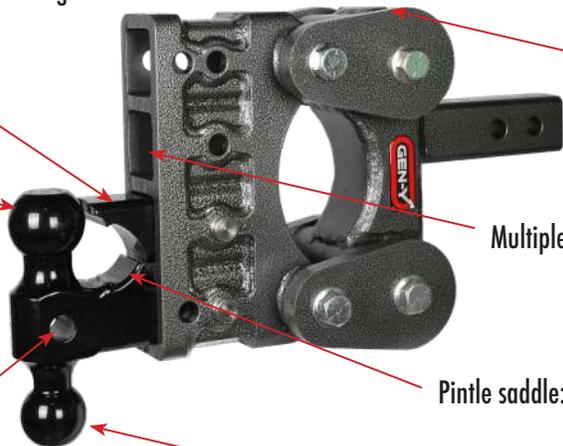

Multiple hitch slots allow for maximum adjustability

Pintle saddle: creates a more secure fit for a lunette/pintle ring.

*Not offered on 10K models

Removable $1\frac{7}{8}$ " ball attachment option

2" Ball

Tongue Weight Scale



Max tongue weight

Min tongue weight

AVERAGE BREAK-IN PERIOD: 500 MILES.

HITCH CAN BE USED IN THE DROP OR RISE POSITION.

* GEN-Y Hitch shall NOT be held responsible for any or all "compatible parts or products" being used or being utilized for towing with or around GEN-Y Hitch.

* GEN-Y Hitch products shall never be altered in any circumstances or for any reason and will void any warranties if done so.