



HARDWARE DESCRIPTION		QTY.
HWKT-05815X		
FLHB- 00688X	3/8"-16 X 1" GRADE 5 HEX SERRATED FLANGE	4

PARTS INCLUDED	QTY
55" RUNNING BOARD	1
DRIVER SIDE MOUNTING BRACKET	1
PASSENGER SIDE MOUNTING BRACKET	1
THREADED NUT PLATE	2

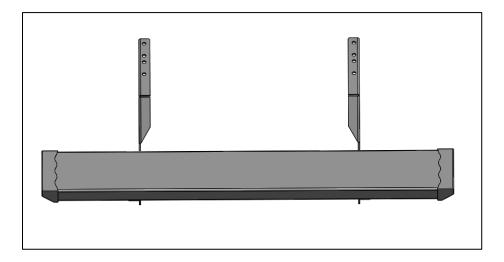

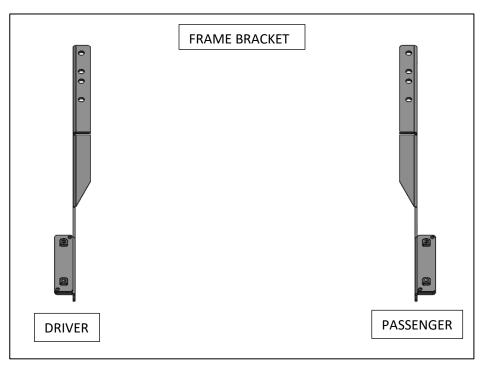

<u>Step 1</u>: If your vehicle is equipped with a tow hook, remove it and discard.



<u>Step 2</u>: Remove driver side and passenger side frame bolts and set aside. Save the bolts for the installation.





<u>Step 3</u>: Install the driver and passenger side-mounting bracket using the factory bolts removed from **Step 2**.


NOTE: There are two mounting positions for two styles of bumpers. Select mounting position for your vehicle.



<u>Step 4:</u> Next, center the running board step along the two brackets.



Step 5: Install the (x2) threaded nut plates and fasten using the suppled 3/8"x1" Hex flanged bolts. Leave loose for now.



<u>Step 6</u>: After final adjustment, tighten all running board threaded mounts and frame bracket bolts.

