

Lighting Installation Instructions

Instructions for assembly

THIS KIT INCLUDES:

- 1 - Wiring Harness
- 1 - Light Switch
- 2 - Halogen Bulbs
- 1 - Red Tap Splice Connector
- 2 - Light Units
- 4 - Hex Head M6 x 30 Bolts
- 4 - 1/4" Dia. x 5/8" Spacers
- 4 - M6 Lock Washers


PLEASE NOTE:

These lights meet or exceed all existing federal, state or provincial laws. The lights must be wired in accordance with these laws when used on public roads. Please note:

The fog lights will only be activated when the headlights are on low beam and will shut off automatically. If the high beams are turned on, the driving lights will only be activated when the headlights are on high beam & will shut off automatically. If the low beams are turned on,



INSTALLING THE LAMPS

- 1) Remove existing brackets from the lamps using a Philips screwdriver (83060R only).
- 2) Insert lamp into housing, place long bolt, with washer through hole in light housing, slip 1/2" spacer over bolt and screw into lamp housing, repeat for other side of lamp. See picture below.

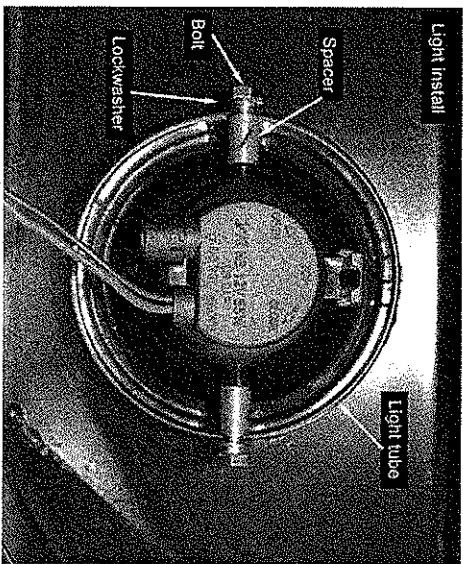

IMPORTANT! - Read This First

- Detach the (-) negative cable from the battery before starting the work of assembly.
 - Make sure that the new leads are properly fastened, and that there is no risk of them coming into contact with moving or heat-emitting components such as cooling fans or exhaust pipes.
 - Fit the relay for the lamps in a suitably protected position in engine compartment.
 - Do not allow fingers to come into contact with the glass of the bulbs.
 - The lamps must be mounted symmetrically.
 - Fog lamps should only be used in fog, heavy rain or when it is snowing.
 - Fog lamps should be used together with the vehicle's side lights, and should be controlled by means of a separate switch in the interior of the vehicle.
- ### ADJUSTING THE BEAM
- Check that the lamps are properly fastened and cannot be displaced.
 - For best results it is always a good idea to have the beam adjusted by a qualified workshop mechanic.

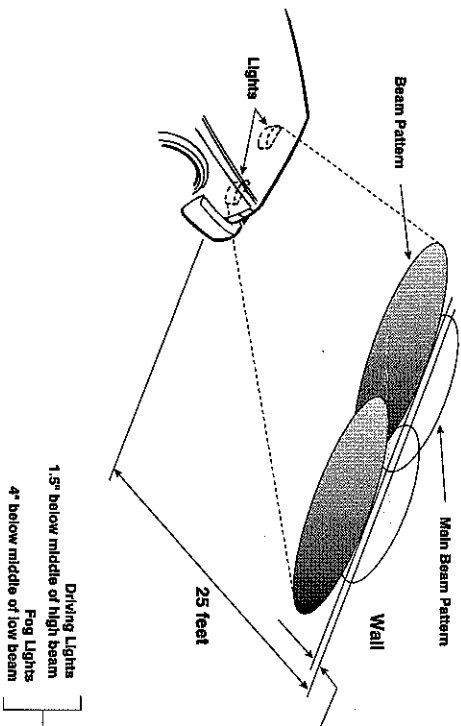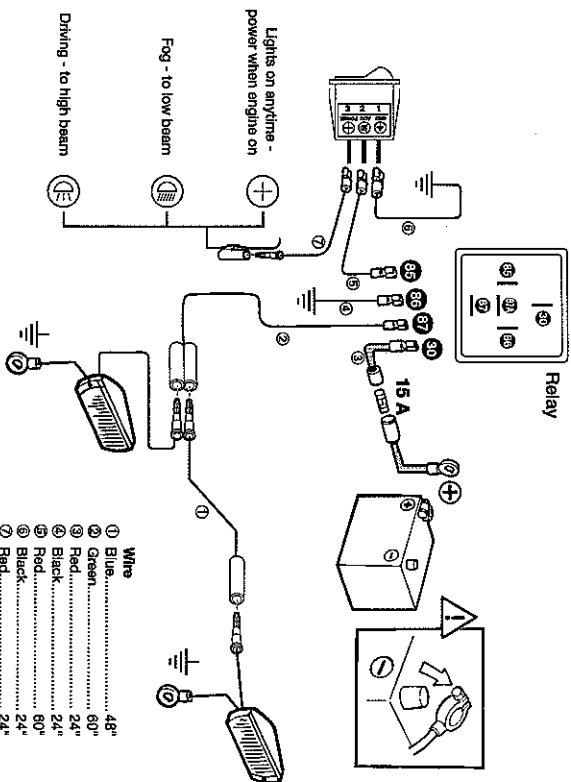

Rampage Limited Product Warranty

The following warranty is exclusive and in lieu of all other warranties, whether expressed, implied or statutory with respect to or relating to any product shipped hereunder (the "Product"), including, but not limited to any warranty of merchantability or fitness for any particular purpose. Rampage Products warrants that the Product is, at the time of shipment to the Purchaser, free of material and workmanship defects provided that there shall be no warranty with respect to any Product which has been repaired or altered in any way, which has been subject to negligence, accident, improper storage or damaged in shipment without the fault of Rampage Products or has not been installed, used or maintained in accordance with normal practice and in conformity with the recommendations or the published specifications of Rampage Products. Rampage Products shall, at its option, repair or replace any defective Product or refund the purchase price of a Product provided a warranty claim is made within one (1) year of the date of shipment of the Product and this shall be the full extent of Rampage Products' liability for breach of warranty.