




VEHICLE					PIONEER	CONNECTOR	HEIGHT ADDED mm / in	
LINCOLN Navigator LWB Gen 4 4WD/SUV Raised Rail 4 dr					62103	RCL4	128 / 5.0	
REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	x	x	✓	✓	x	x	x	x
RUN DATES	-	-	2018 -	2018 -	-	-	-	-
VEHICLE NOTES	Requires RCP75-BK - Sunroof can be operated							


VISIT THE ONLINE CALCULATOR FOR CURRENT SYSTEM LOAD LIMIT DATA




DYNAMIC LOAD LIMIT (ON AND OFF-ROAD):
***USE THE VEHICLE MANUFACTURER'S MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED**


 CARGO


 SYSTEM WEIGHT


 LOAD LIMIT

OR


 Max kg

UP TO **72 Kg**
158 lbs


+

28 Kg
62 lbs


=

UP TO **100 Kg**
220 lbs

***VEHICLE MANUFACTURER'S ROOF LOAD LIMIT**


TOTAL STATIC LOAD LIMIT: UP TO 250 Kg / 551 lbs*

UNDERBAR SPACING

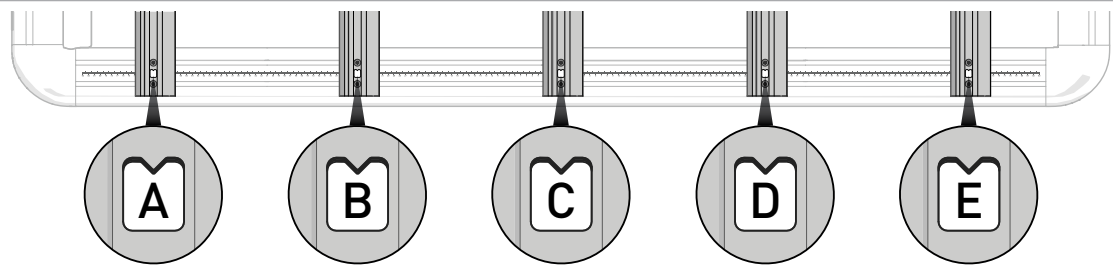FRONT								REAR
BAR	A	B	C	D	E	F	G	
DIMENSION (CM)	-66	33	0	33	66			
SPACERS REQ'D								
CONNECTOR	RCL				RCL			
OUTER UNDERBAR COVER (mm/in)	Refer to Step 11-12 in the Pioneer Series 6 Instructions to trim B and C							
CENTRE UNDERBAR COVER (mm/in)	Refer to Step 11-12 in the Pioneer Series 6 Instructions to trim A							

NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.