



VEHICLE				PIONEER		CONNECTOR		TRAY HEIGHT ADDED (mm/in)	
NISSAN Titan Crew Cab Gen 2 SHORT BED 5.5ft				52120		RTD4		298/12	
VEHICLE NOTES									
REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA	
AVAILABILITY	x	x	✓	✓	x	x	x	x	
RUNNING DATES	-	-	2016-	2016-	-	-	-	-	

VISIT THE ONLINE
CALCULATOR FOR
CURRENT SYSTEM
LOAD LIMIT DATA




DYNAMIC LOAD LIMIT (ON AND OFF-ROAD):
***USE THE VEHICLE MANUFACTURER'S MAXIMUM TRACK ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED**


 CARGO


UP TO **89 Kg**
196 lbs

+


 SYSTEM WEIGHT


31 Kg
68 lbs


=


 LOAD LIMIT

UP TO **120 Kg**
265 lbs


OR



***VEHICLE
MANUFACTURER'S
TRUCK BED UTILITY
TRACK LOAD LIMIT**

 **TOTAL STATIC LOAD LIMIT: UP TO 300 Kg / 661 lbs***

BASE

RECOMMENDED TOWER SPACING

TRACK NUTS	
	
PART DETAILS	
PART NO	RD-FK2
QTY	1

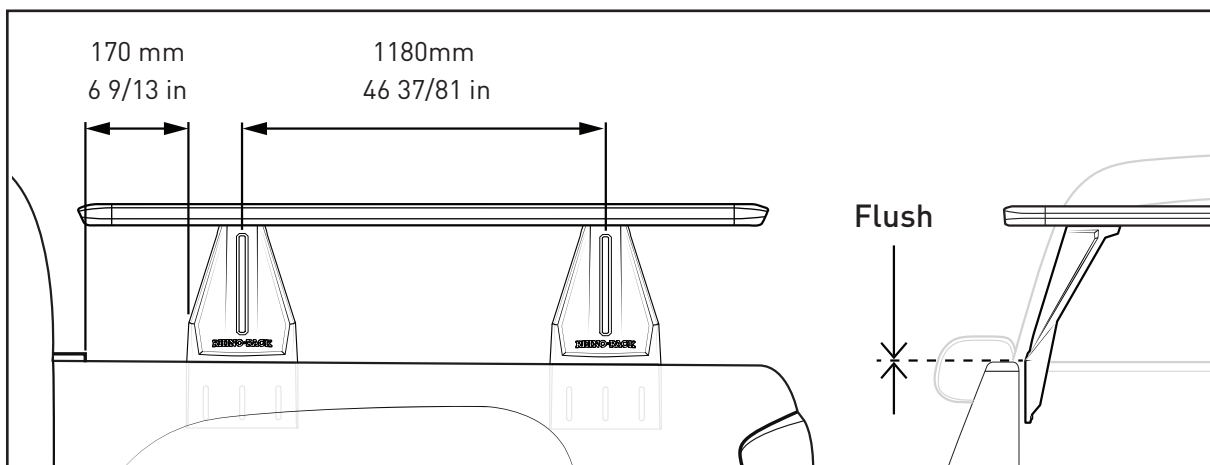

FRONT

+

After positioning Towers and Pioneer, return to Reconn-Deck Tower Instructions.

NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.

Document No: R2784
 Issue No: 1
 Issue Date: 12-May-21