



VEHICLE				PIONEER		CONNECTOR		TRAY HEIGHT ADDED (mm/in)	
TOYOTA Tundra Double Cab Gen 2 STD BED 6.5ft				52120		RTD4		298/12	
VEHICLE NOTES									
REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA	
AVAILABILITY	x	x	✓	✓	x	x	x	x	
RUNNING DATES	-	-	2007-2021	2007-2021	-	-	-	-	

VISIT THE ONLINE
CALCULATOR FOR
CURRENT SYSTEM
LOAD LIMIT DATA




DYNAMIC LOAD LIMIT (ON AND OFF-ROAD):

***USE THE VEHICLE MANUFACTURER'S MAXIMUM TRACK ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED**



CARGO

UP TO **89 Kg**
196 lbs




SYSTEM WEIGHT

+ 31 Kg
68 lbs


=

UP TO **120 Kg**
265 lbs

OR




***VEHICLE MANUFACTURER'S TRUCK BED UTILITY TRACK LOAD LIMIT**





TOTAL STATIC LOAD LIMIT: UP TO 300 Kg / 661 lbs*

BASE

RECOMMENDED TOWER SPACING

TRACK NUTS	
	
PART DETAILS	
PART NO	RD-FK1
QTY	1

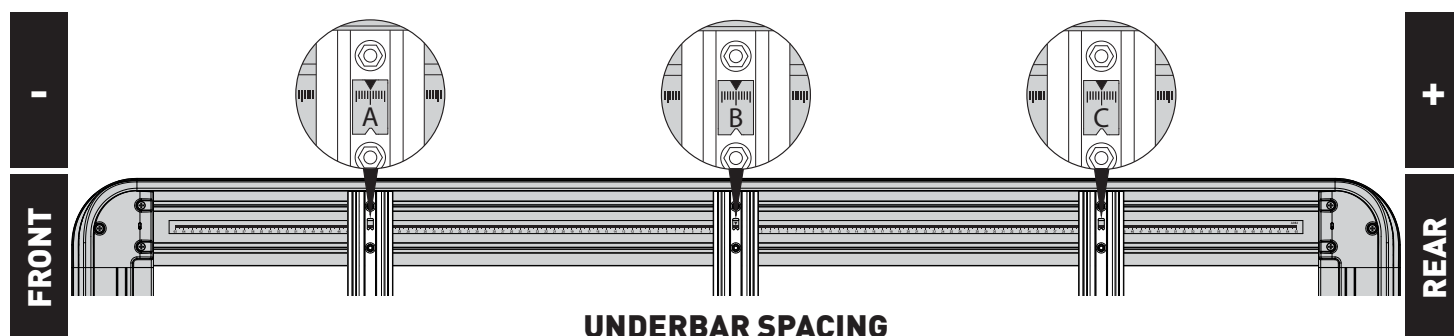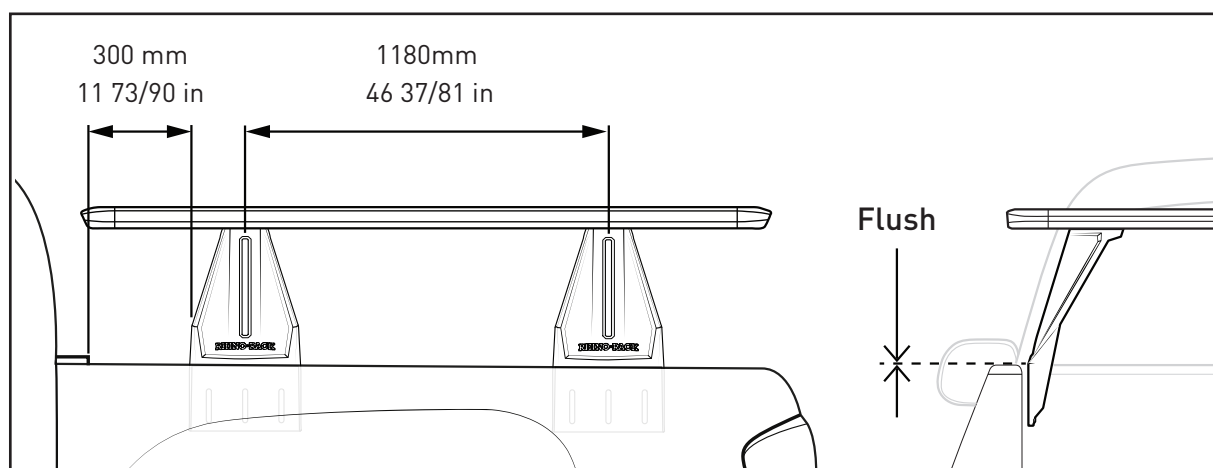

UNDERBAR SPACING

BAR NO.	A	B	C	D	E	F	G
DIMENSION (CM)	-58.5	0	58.5				
CONNECTOR	RDT		RDT				

After positioning Towers and Pioneer, return to Reconn-Deck Tower Instructions.

NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.

Document No: R2794
Issue No: 1
Issue Date: 12-May-21