



# INSTALLATION MANUAL

## UTV-59-MB

### Level of Difficulty

Easy

### Parts List

- |   |             |
|---|-------------|
| 1 | UTV toolbox |
| 2 | Key         |

\* Vehicle-specific hardware is included in hardware kits (sold separately)

### Tools Required

Refer to vehicle-specific hardware kit

### Torque Specifications

M6 bolt	3 ft-lbs.
1/4" bolt	3 ft-lbs.

\* Above specifications are general guidelines. If purchasing hardware use the torque specifications provided with that hardware.

### Maintenance

For polished, gloss and other smooth finishes, polish may be used to clear small scratches and scuffs on the finish.

Mild automotive detergent may be used to clean the product. Do not use dish detergent, abrasive cleaners, abrasive pads, wire brushes or other similar products that may damage the finish.

### Product Registration and Warranty

CURT Group stands behind our products with industry-leading warranties. Provide feedback and help us to improve our products by registering your purchase at: [warranty.curtgroup.com/surveys](http://warranty.curtgroup.com/surveys)

### ⚠ DANGER

Danger of explosion. Do not use this product for storing or transporting flammables, explosives, hazardous materials or hazardous waste, such as containers of gasoline, solvents, gun powder, dynamite, propane tanks, acetylene tanks and cutting torches.

### ⚠ CAUTION

Ensure all knobs, bolts, screws, straps and locks are firmly secured before every trip. Periodically re-tighten and inspect all components for signs of wear, corrosion and fatigue.

### ⚠ WARNING

Never exceed the vehicle manufacturer's recommended capacity.

Before drilling into your UTV bed, check under your vehicle to ensure the drill location does not puncture, cut or obstruct any brake or fuel fluid lines, electrical wires, fuel tanks, etc. Precaution must be taken that all fasteners near the fuel tank do not create the possibility of fuel tank puncture or other damage during a collision.

This product can reduce the driver's ability to clearly see roadways, vehicular or pedestrian traffic and other objects through the rear and side windows of the vehicle, which may cause an accident. Extra precaution should be taken when driving a vehicle with this product.

Do not interfere with factory-installed safety equipment.

### Product Photo



### NOTICE

Before you begin installation, read all instructions thoroughly.

Proper tools will improve the quality of installation and reduce the time required.

To help prevent damage to the product or vehicle, refer to the specified torque specifications when securing hardware during the installation process.

Do not use this product for purposes other than those for which they were designed. Never modify this product.

Consult your dealer if you have any questions regarding the installation, operation, use and limits of this product.

Treat or seal all fasteners and exposed metal in any holes drilled in vehicle to prevent corrosion.

### Step 1

Place the tool box in the truck bed.

Using a tape measure, make sure the tool box is centered in the truck bed.

Open the tool box lid. Ensure there is clearance between the open lid and the top and back of the cab.

**Note:** Refer to the manual included with the vehicle specific hardware pack for further installation instructions.




### Step 2

Tool boxes come with adjustable strikers.

If the strikers are ever out of alignment, simply loosen, adjust and re-tighten.

Periodically lubricate the strikers and locks to ensure optimum performance.

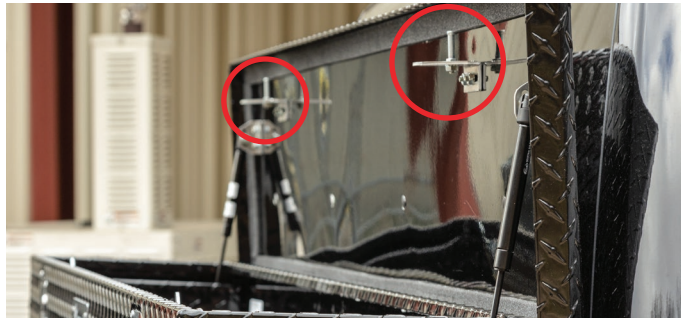

### Step 3

With the crossover tool box installed, periodic inspections should be performed to ensure all mounting hardware remains tight.

To protect your investment, see the 'Maintenance' section on page one.

Congratulations on the installation of your new UWS crossover UTV tool box.

