

Input Voltage	Max Power Draw Amber – 48" / 60"	Max Power Draw White – 48" / 60"
12-15V DC	12W / 15W	12W / 15W

Warranty and Disclaimer

Within THREE years after the purchase date, the original buyer may return any XKGLOW products that has one or more LEDs that fail to illuminate, due to a defect in materials or workmanship.

Installation of this product must be performed by a licensed professional. Should the failure of the product be the result of damage occurring as a result of improper installation, alteration of the product or an act or omission on the part of the consumer, this warranty is void. XKGLOW Lighting shall not be responsible for any consequential damages which arise from the use and/or installation of the product. If the kit is installed in any manner other than specified, XKGLOW Lighting reserves the right to deny any warranty claims at the discretion of the technical support department. Any product return must include the original packaging, invoice number and a statement of the alleged defect. Upon receipt of the returned product, the company will test the product for defect. If the results of the testing do not support the warranty claim, do not reveal any defect or indicate consumer negligence in the installation and handling of the product, then the product will be returned to you and you will be charged a reshipping fee. If the product is returned from an address within the continental United States, within the first 30 days after purchase, and is found to be defective, XKGLOW Lighting will exchange or refund the original purchase expense. This offer does not extend to the cost for shipping charges on any international packages.

Additional Disclaimer Terms

Please check your local and state laws for the proper use of this product.


- Improper installation of electrical products such as lighting may cause damage to any vehicle or device to which the improperly handled or installed lighting is attached.
- Improperly installed product may cause electrical injury to persons.
- Installation of this product must be performed by a licensed professional.
- XKGLOW assumes no liability for the installation of the product.
- Warranty or liability will not exceed the product purchase price, which shall be buyer's sole and exclusive remedy.
-

Return/Exchange Procedure

1. Email xk@xkglow.com to notify us of the product issue as well as the item number and name of customer on invoice.
2. We will send you the trouble-shooting guide to fix the issue, or to narrow down which of the component(s) need to be replaced. If the issue still exists, we will ask you to send back the defective items to be replaced.
3. Please send the returned item as instructed, along with claims and a telephone number where you can be reached.
4. After the returned item(s) have been accepted and inspected, we will issue a refund or replace the items ASAP. For refunds, item(s) must be sent to XKGLOW within 14 days from date of purchase. Original shipping charges are not refundable.

We always stand behind our products and are committed to our customers! For questions you may have, please contact xk@xkglow.com. We normally respond within 24 hours. (Monday-Friday).

Wiring Diagram

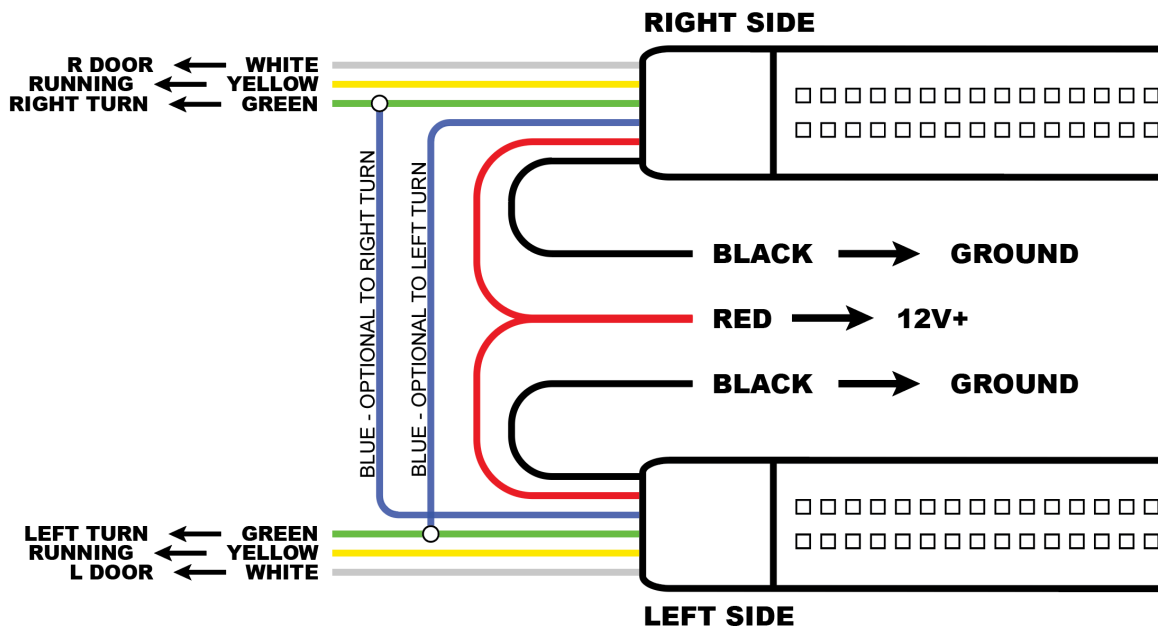

Mounting Instructions


Permanent Mounting:

- 1. Prep mounting surface:** Using isopropyl alcohol, thoroughly clean the mounting surface. Any dirt or debris left on the paint will prevent the light bar from adhering properly. Let dry.
- 2. Position light bar:** Remove red tape backing and loosely position the light bar onto the vehicle. Do not press firmly! Step back to ensure that light bar is centered and straight. Once in position, firmly and thoroughly press onto the vehicle. Repeat for other side of vehicle.

Removable Mounting:

- 1. Prep mounting surface:** Using isopropyl alcohol, thoroughly clean the mounting surface.

- 2. Install brackets:** Evenly space and snap the brackets onto the light bar. With the brackets snapped onto the light bar, use masking tape and loosely position the bar into place on the vehicle. Ensure light bar is centered and straight and mark the position of each bracket. Remove the light bar and using the self-tapping screws, secure the brackets to the vehicle.

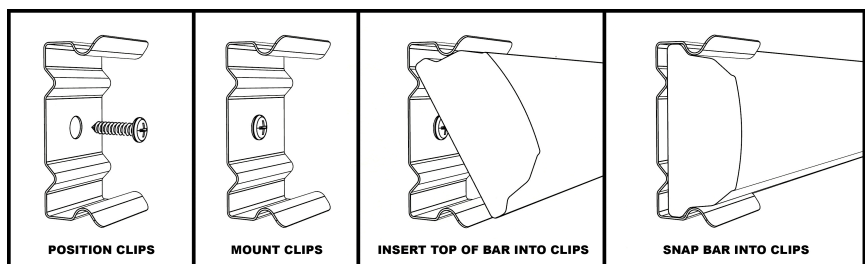

- 3. Install light bar:** Insert the top of the bar into the brackets first and then push the bottom of light bar into the brackets. Repeat for other side of vehicle.

Wiring

- 1.** Begin by connecting the **RED** wire to a **constant** 12V+ power source and the **BLACK** to ground.
- 2.** Using the supplied scotchloks, tap the white, yellow, and green wires into its corresponding wire following the diagram above. Tap the **WHITE** wires into the positive courtesy door light wire on each side. Tap the **YELLOW** wires into the positive running light wire. Then tap the **GREEN** wires into the positive turn signal wire on each respective side. Example: The green wire on the driver side light bar should be tapped into the positive turn signal wire on the driver side of the vehicle.
- 3. OPTIONAL:** The optional strobe mode is triggered with the blue wire. **If the blue wires are connected, the light bars will perform an intense white/amber alternating strobe when hazard is on. If these wires are not used, the light bars will blink amber in sync with factory hazard mode.** Tap the **BLUE** wires into the *opposite* side positive turn signal wire. Example: The blue wire on the driver side light bar should be tapped into the positive turn signal wire on the passenger side of the vehicle. Included with the kit is 12ft of blue extension wire. Use this to reach the opposite sides of the vehicle.
- 4.** Secure any loose wiring.
- 5.** Power on vehicle and test functionality.