

Input Voltage	Power Rating (10" / 20" /30")	Lumen Rating (10" / 20" / 30")
12-24V DC	24 w / 48 w / 72w	2700lm / 5400lm / 8100lm

Warranty and Disclaimer

Within THREE years after the purchase date, the original buyer may return any 2in1 Light Bar that has failed due to a defect in materials or workmanship.

Installation of this product must be performed by a licensed professional. Should the failure of the product be the result of damage occurring as a result of improper installation, alteration of the product or an act or omission on the part of the consumer, this warranty is void. XKGLOW Lighting shall not be responsible for any consequential damages which arise from the use and/or installation of the product. If the kit is installed in any manner other than specified, XKGLOW Lighting reserves the right to deny any warranty claims at the discretion of the technical support department. Any product return must include the original packaging, invoice number and a statement of the alleged defect. Upon receipt of the returned product, the company will test the product for defect. If the results of the testing do not support the warranty claim, do not reveal any defect or indicate consumer negligence in the installation and handling of the product, then the product will be returned to you and you will be charged a reshipping fee. If the product is returned from an address within the continental United States, within the first 30 days after purchase, and is found to be defective, XKGLOW Lighting will exchange or refund the original purchase expense. This offer does not extend to the cost for shipping charges on any international packages.

Additional Disclaimer Terms

Please check your local and state laws for the proper use of this product.

- Improper installation of electrical products such as lighting may cause damage to any vehicle or device to which the improperly handled or installed lighting is attached.
- Improperly installed product may cause electrical injury to persons.
- It is recommended that the kit should be installed by a licensed professional.
- XKGLOW assumes no liability for the installation of the product.
- Warranty or liability will not exceed the product purchase price, which shall be buyer's sole and exclusive remedy.




Return/Exchange Procedure

1. Email [xk@xkglow.com] to notify us of the product issue as well as the item number and name of customer on invoice.
2. We will send you the trouble-shooting guide to fix the issue, or to narrow down which of the component(s) need to be replaced. If the issue still exists, we will ask you to send back the defective items to be replaced.
3. Please send the returned item as instructed, along with claims and a telephone number where you can be reached.
4. After the returned item(s) have been accepted and inspected, we will issue a refund or replace the items ASAP. For refunds, item(s) must be sent to XKGLOW within 14 days from date of purchase. Original shipping charges are not refundable.

We always stand behind our products and are committed to our customers! For questions you may have, please contact xk@xkglow.com. We normally respond within 24 hours. (Monday-Friday).




Mounting with Included L Brackets

- 1. Install end brackets:** Loosely install the included L brackets on each end of the light bar. These will be snugged down once the light bar is mounted and the angle is properly adjusted.
- 2. Position light bar:** Find a suitable location to mount the light bar. For most effective mounting, light bar should be mounted to a flat metal surface. Ensure that there is ample space to allow the light bar to rotate to your desired position.
- 3. Mount light bar:** Using the L brackets as a guide, mark and drill the holes using a ¼" drill bit. Tightly secure the light bar with the included M6 hardware. With the light bar in place, you can now fine tune the angle adjustment. Once adjusted, snug the screws at each end of the light bar down to lock the position.

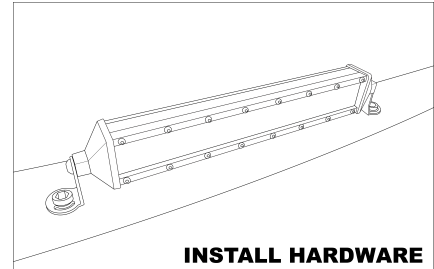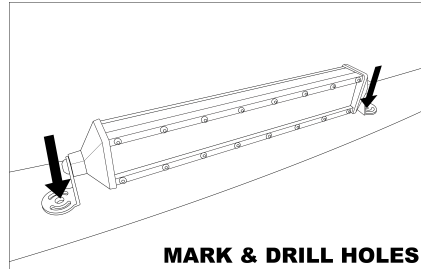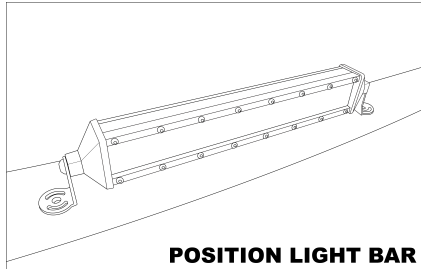

Mounting with Optional Drill-Less Brackets

- 1. Install brackets to light bar:** Loosely install the included L brackets on each end of the light bar. These will be snugged down once the light bar is mounted and the angle is adjusted. Install one of the drill-less brackets onto the bottom side of each L bracket. Keep these loose as these will be adjusted once on the vehicle.
- 2. Position light bar:** Find a suitable location to mount the light bar. The drill-less brackets must be mounted to the edge of a body panel (see below). Ex.- mounted on the end of the hood closest to the windshield with the light bar pointing forward. Ensure that the set screws are loose enough to accommodate the thickness of the body panel. Carefully slide the brackets over the edge of the panel.
- 3. Tighten drill-less brackets:** Each drill-less bracket has three set screws on the bottom side. Tighten these down to snug the brackets down onto the edge of the body panel. Repeat for the other side.
- 4. Tighten end brackets:** With the drill-less brackets secure; you can now tighten the L brackets. Begin with the screws going into the drill-less brackets and then move on to the others after adjusting the angle of the light bar to your liking.

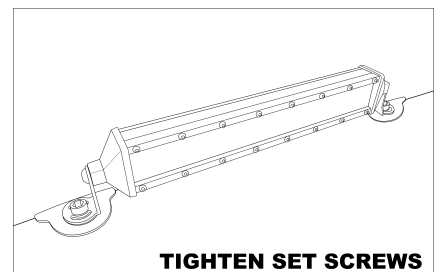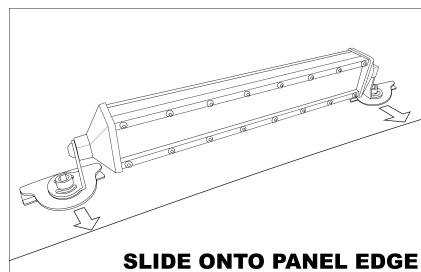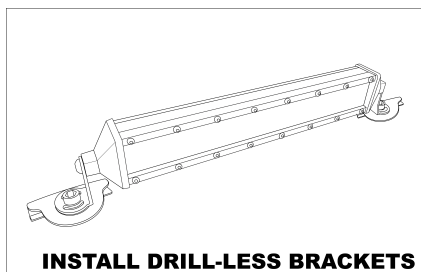

Mode Selection

The color modes are controlled via the push button switch. Functionality is as follows-

- **One press** to turn the light bar **ON**. WHITE is default.
- **Double press** to **switch** between WHITE and GREEN. You must press and release the button entirely for the press to register. The second press must be within 10 seconds to switch to the other color.
- **One press** to turn the light bar **OFF**.

Wiring

Thanks to its on-board controller and included wiring harness, the 2in1 Light Bars do not need any additional wiring or plugs. Diagram for the wiring harness can be seen below. Feed the black connector on the harness to the light bar and plug in. Route the black and red power wires towards the battery. Secure the power relay in place using either a screw or a zip tie. To ensure longevity of the relay, mount in the upright position with the metal mounting hole facing up. This will prevent water from sitting near the electrical components. Locate the ON/OFF switch in a convenient location.

Connect the ring terminals to the battery. The RED wire is to be hooked to 12V+ and the BLACK wire is the 12V- (ground). Secure any loose wiring and ensure that the newly installed harness will not come into contact with any hot or moving parts.

