



STEP 1 – PRIOR TO INSTALLATION

- A) Bushwacker only approves installing the flares according to these written instructions with the hardware provided. WARNING:** Failure to install according to these instructions will invalidate the warranty. This includes, but is not limited to using alternative installation methods, hardware, or materials. **DO NOT USE:** Loctite, SuperGlue, or similar products on the hardware or the flares.
- B) Fit:** Verify the fit of the flares to vehicle. (Some filing, sanding, or cutting may be necessary to ensure proper fit).
- C) Painting:** (Optional) if paint is desired it must be done prior to installing flares on vehicle. Clean outer surface with a good grade degreaser. **DO NOT USE LACQUER THINNER OR ENAMEL REDUCER AS A DEGREASER.** Wipe outer surface thoroughly with a tack rag prior to paint. Application of plastic adhesion promoter for ABS plastic as per your paint system manufacturer's recommendations is required. Paint flares using a high quality enamel, or polyurethane automotive paint. If painting edge trim (not recommended), use a flex additive.
- D) Performance:** Using larger Tires may increase the area required to turn the vehicle. Some Tire/Rim combinations may require lowering bump stops and or installing steering stops to prevent tire from contacting flare.
- E) Exhaust System:** Modifications may be necessary to maintain a minimum 4" clearance between flares and exhaust pipes. (Exhaust gases should not vent directly onto flares)
- F) Metal Protection:** All exposed fasteners and bare metal should be treated with rust resistant paint **BEFORE** installing flares. Spray inner fender wells with undercoating **AFTER** flare attachments have been completed.
- G) Decals:** Flares may interfere with existing decals on vehicle. If you wish, remove decals prior to installation of flares.
- H) Care & Cleaning:** Bushwacker fender flares are built to last; any detergent you use to wash your vehicle is sufficient to clean the flare. Do not use any harsh abrasive detergents.

Ford Cut-Out™ Fender Flares Front Pair

Set Part #20101-02

Rev-1 01/30/2017

For complete fitment info visit : www.bushwacker.com

TOOLS FOR EASY INSTALLATION:

- Grease Pencil
- Masking Tape
- Measuring Tape
- Pry Tool
- Pliers
- #2 Phillips Driver
- Socket Wrench
- 8 mm Socket
- 7/32 mm Socket
- Electric Drill
- 1/8" Drill Bit
- 13/64" Drill Bit
- Awl or Similar Pointed Tool
- Angle Grinder
- Cut Off Wheel
- Sawsall
- Center Punch
- Hammer

PLEASE READ: Dirt and debris can become lodged between the fender flares and the vehicle's fenders, causing scratching and paint wear from vibration. Lund International is not responsible for any damage, and the installation of our fender flares is done with the buyer's understanding that this scratching and paint wear may occur.

LIMITED LIFETIME WARRANTY AGAINST ANY MANUFACTURING DEFECTS

- To claim a warranty, you must provide Proof of Purchase.


Included in Hardware Kit:

- | | | | | | | | | | | | |
|----|---|----|---|----|---|----|---|----|--|----|---|
| 1. |  | 2. |  | 3. |  | 4. |  | 5. |  | 6. |  |
| | SP1-0009,
3/8" x 5/8" x .187"
Neo Black Spacer,
40 pcs | | SW1-0045,
#14-14 x 1"
Torx Screw,
38 pcs | | SW1-0052,
T-45 Torx Bit,
1 pc | | GP1-0008,
Duro (NC02/S 70)
Edge Trim,
356 inches | | SW1-0056,
#8 x 3/4"
PH Screw,
2 pcs | | SW1-0066,
#8 x 5/8" Phillips
PH Drill Screw,
8 pcs |


STEP 2 - EDGE TRIM INSTALLATION

A. Peel two to three inches of red vinyl backing away from Edge Trim (GP1-0008) tape. Applying the adhesive side of the edge trim to the inner side of the flare, affix the edge trim to the top edge of the flare (the portion that comes in contact with the vehicle).


B. Press edge trim into place along the top edge of the flare in one-foot increments, pulling red vinyl backing free as you continue to work your way around the top edge of the flare.

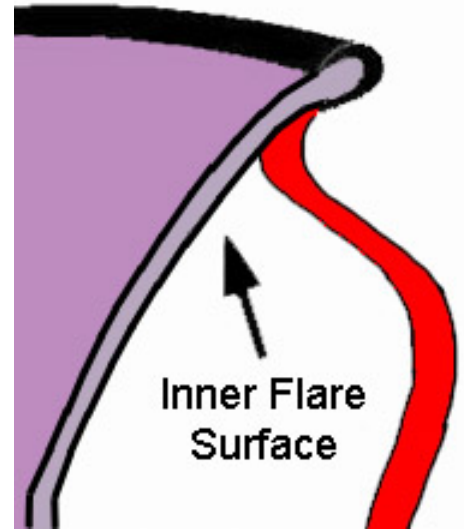

Front Flare Installation Procedures (Driver's Side):

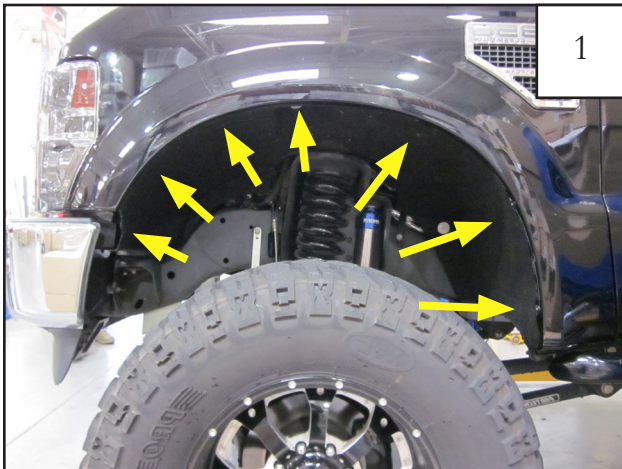

Remove seven factory installed screws inside wheel well with 5.5 mm socket wrench. *Save for reinstallation.*

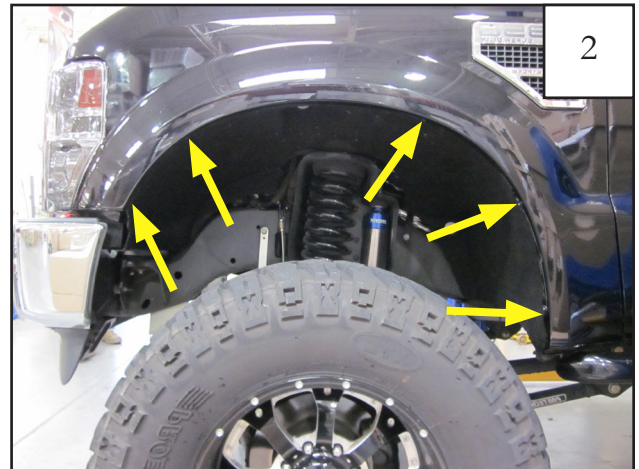


Remove five factory installed screws along edge of wheel well using a 5.5mm socket wrench. *Save for reinstallation.*



Remove the splash guard.




Use grease pencil to mark edge of inside wheel well flange. Start 3" up from top flange screw hole.

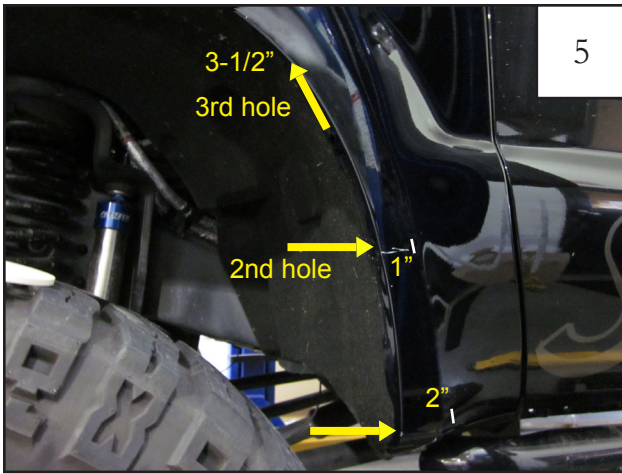

Measure 2" from edge of rearward wheel well and mark with grease pencil. Make another mark 1" in from 2nd factory hole from the bottom. Make last mark 3-1/2" up from 3rd hole from the bottom.



Using marks as a guide, use masking tape to create an arc from the lower mark to the upper mark. Inner edge of tape should be *outside* of marks made in previous step.

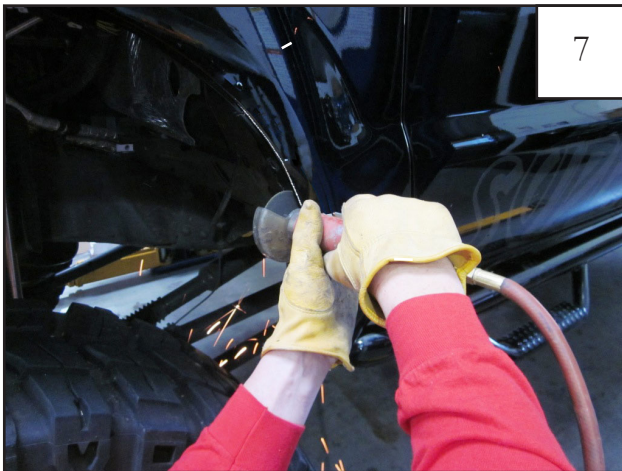


Using a cut-off wheel, cut and remove inner flange.



Mark fender with grease pencil about every 2" up to edge of masking tape. NOTE: Ensure sufficient space allowed around pre-existing holes to maintain hole integrity.




Using a cut-off wheel, cut fender along marked lines up to inner edge of tape.

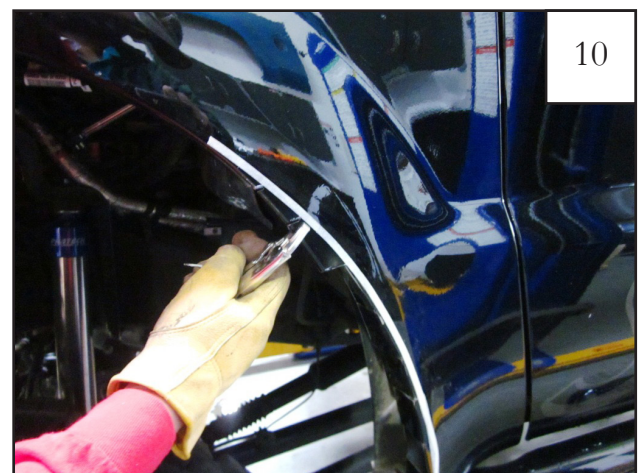

Bend tabs into wheel well with pliers and flatten.




Using a hammer and an angle grinder, flatten tabs then grind down any sharp edges. Treat any bare sheet metal with rust resistant paint BEFORE continuing.

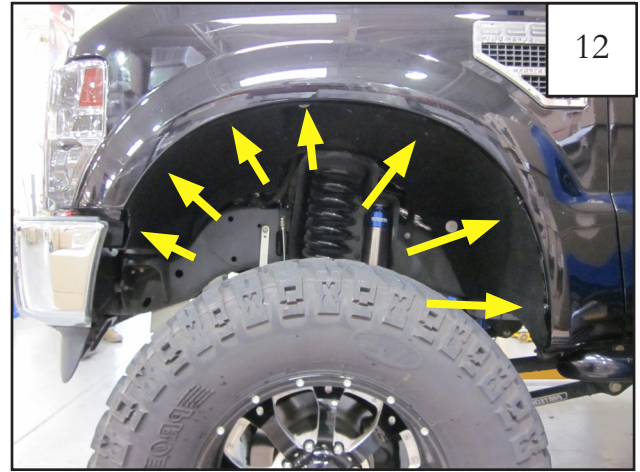

Reinstall saved factory screws removed in Step 1 through splash guard using 5.5mm socket.



Hold flare tightly against fender, lining it up along style lines, drill into sheet metal through pre-drilled flare holes at rear side using 1/8" drill bit.

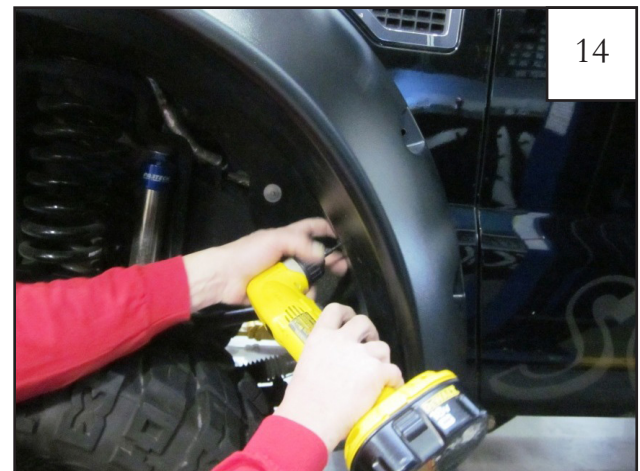

Reinstall factory screws removed in Step 2 into holes drilled in previous step. *Tighten ALL screws to ensure proper alignment of flare for pocket hardware installation.*



Hold flare in place. Using a scratch awl and pocket holes in flare as a guide, mark vehicle for drilling.



Remove screws installed in Step 14 and flare. Using marks made with scratch awl as a guide, use a center punch to score sheet metal prior to drilling.



Using a 1/8" bit, drill marked hole locations. Then, using a 13/64" bit, drill holes again.



Thread bolt (SW1-0045) through pocket hole in flare then install spacer (SP1-0009) over end of bolt. *Hand tighten* spacer on bolt until snug near flare plastic.



Install flare using factory screws removed in Step 16 through holes indicated.



Using torx bit (SW1-0052), *start* bolts installed in Step 18 through holes drilled in Step 17. *Once all bolts are in place, tighten all screws.*



Completed front flare installation.